

HC2061 BOLLARD



➤ **HC2061 Bollard**

Specifications:

- Stainless steel bollard with flat top.
- 316 grade stainless steel.
- Pipe is 101 mm dia with a 3 mm thickness.
- 900 mm overground level and 300 mm underground level.
- Brushed finish.

Fitting:

Fixed bollard is fixed under ground level in concrete, removable bollard comes complete with retention socket.

Concrete Foundations:

Fixed bollard: 500 x 500 x 300mm

Removable bollard: 500 x 500 x 300mm (hardcore for drainage is recommended under the socket before the concrete).

Options Available:

- Fixed and removable versions available.
- Range of sockets available.
- Other lengths available on request.
- Reflective strip.
- Base plates available to surface fix.
- Matches HC2089 cycle stand. ➤

BOLLARD RANGE




➤ **HC2061 Bollard with reflective strips**



➤ **HC101F Retention Socket**



➤ **HC101R Retention Socket**

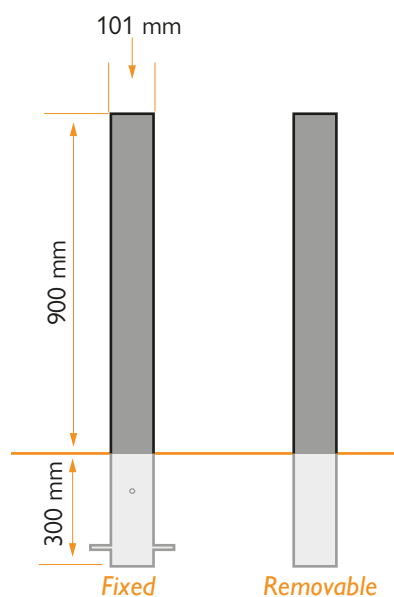

Specifications:

Pipe (Dia)	101 mm
Wall Thickness	3 mm
Overground	900 mm
Underground	300 mm



HARTECAST
Street Furniture