

# HC2015 BOLLARD



## HC2015 Bollard

### Specifications:

- Stainless steel bollard with cast stainless steel cap.
- 316 Grade Stainless Steel
- Pipe is 139mm x 4mm wall thickness.
- 900mm over ground level, 300mm under ground level.
- Polyester powder coat finish, see our colour options. ➤

### Fitting:

Fixed bollard is fixed underground level in concrete, removable bollard comes complete with retention socket.

### Concrete Foundations:

Fixed bollard: 500 x 500 x 300 mm

Removable Bollard: 500 x 500 x 300 mm (hardcore for drainage is recommended under the socket before the concrete).


### Options Available:

- Fixed and removable versions available.
- Retention socket available.
- Other lengths available on request.
- Base plates available to surface fix.
- Colours.
- Reflective strips.
- Matching single collar version available, see ref HC2015C with contrasting colour top. ➤
- Double collar version available, see ref HC2015DC with double collar contrasting colour top. ➤

## BOLLARD RANGE



## Colour Options

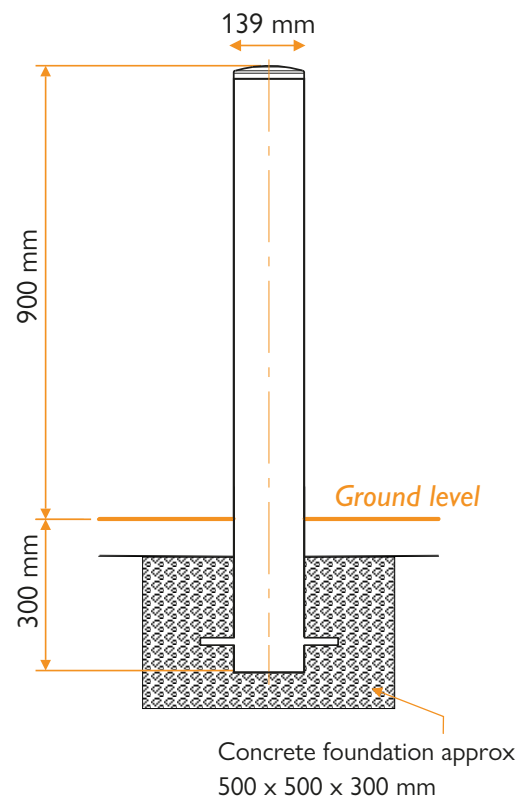

### Specifications:

Pipe Dia.	139 mm
Wall Thickness	4 mm
Overground	900 mm
Underground	300 mm



**HARTECAST**  
Street Furniture