

# HC2060 BOLLARD




➤ **HC2060 Bollard**

## BOLLARD RANGE



➤ **HC2060 With reflective strips**



➤ **HC101F Retention Socket**



➤ **HC101R Retention Socket**

### Specifications:

- Stainless steel bollard with angled top.
- 316 grade stainless steel.
- Pipe is 101 mm dia with a 3 mm thickness.
- 900 mm overground level and 300 mm underground level.
- Electro-polished finish.

### Fitting:

Fixed bollard is fixed underground level in concrete, removable bollard comes complete with retention socket.


### Concrete Foundations:

Fixed bollard: 500 x 500 x 300mm

Removable bollard: 500 x 500 x 300mm (*hardcore for drainage is recommended under the socket before the concrete*).

### Options Available:

- Fixed and removable versions available.
- Range of sockets available.
- Other lengths available on request.
- Reflective strip.
- Base plates available to surface fix.

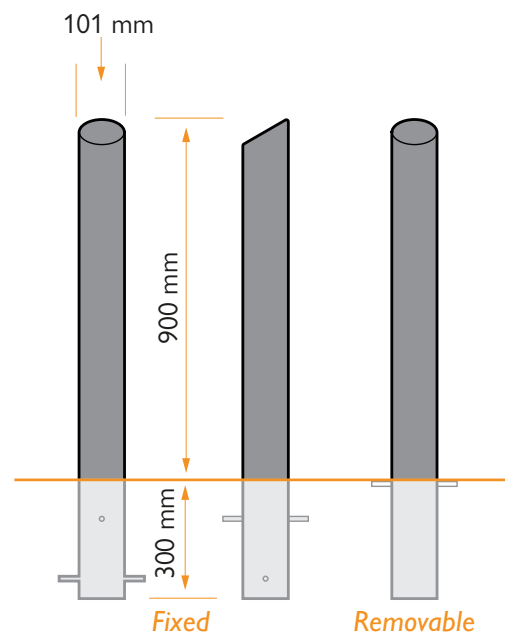

### Specifications:

Pipe (Dia)	101 mm
Wall Thickness	3 mm
Overground	900 mm
Underground	300 mm



**HARTECAST**  
Street Furniture

www.hartecast.com E: info@hartecast.com IRL T: +353 (0)51 424922 UK T: +44 (0)161 820 6906