

HC2067 BOLLARD



HC2067 Bollard

Specifications:

- Stainless steel bollard with cast stainless steel cap.
- 316 grade stainless steel.
- Pipe is 108mm dia with a 4mm thickness with 90mm high cap.
- 900 mm overground level and 300 mm underground level.
- Polyester powder coat finish, see our colour options.

Fitting:

Fixed bollard is fixed underground level in concrete, removable bollard comes complete with stainless steel retention socket.

Concrete Foundations:

Fixed bollard: 500 x 500 x 300 mm

Removable Bollard: 500 x 500 x 300 mm (*hardcore for drainage is recommended under the socket before the concrete*).

Options Available:

- Fixed and removable versions available.
- Stainless steel flip lid socket or flush socket available.
- Reflective tape.
- Any length available on request.
- Matches HC2090 cycle stand.
- Base plates available to surface fix.

Specifications:

| | |
|----------------|--------|
| Pipe (Dia) | 108 mm |
| Wall Thickness | 4 mm |
| Overground | 900 mm |
| Underground | 300 mm |


BOLLARD RANGE




Colour options



Stainless steel flip lid socket.



Stainless steel flush socket.

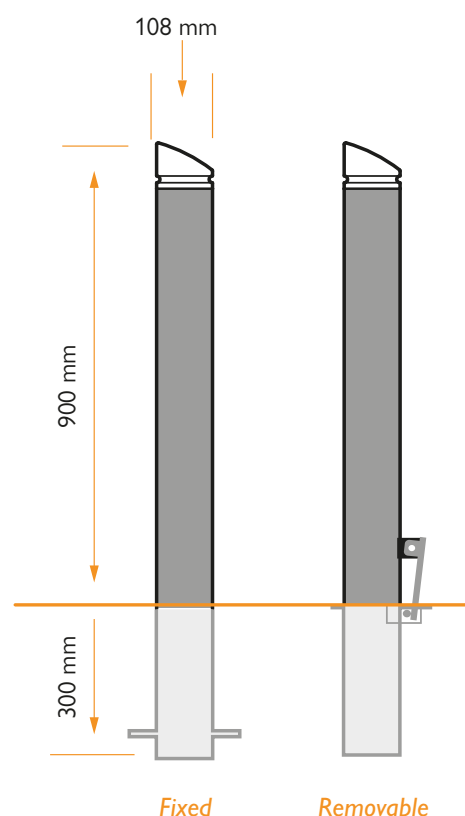

HARTECAST
Street Furniture

www.hartecast.com E: info@hartecast.com IRL T: +353 (0)51 424922 UK T: +44 (0)161 820 6906