

# HC2075 BOLLARD



➤ **HC2075 Bollard**

## BOLLARD RANGE



➤ **Colour Options**



➤ **HC76F Retention socket**

### Specifications:

- Stainless steel bollard with cast stainless steel cap.
- 316 grade stainless steel.
- Pipe is 76 mm dia with a 4 mm thickness (extremely robust) with 30 mm high cap.
- 900mm overground level and 300 mm underground level.
- Polyester powder coat finish, see our colour options. ➤

### Fitting:

Fixed bollard is fixed underground level in concrete, removable bollard comes complete with retention socket.


### Concrete Foundations:

Fixed bollard: 500 x 500 x 300 mm

Removable Bollard: 500 x 500 x 300 mm (*hardcore for drainage is recommended under the socket before the concrete*).

### Options Available:

- Fixed and removable versions available.
- Other lengths available on request.
- Base plates available to surface fix.
- Colours.
- Reflective tape.

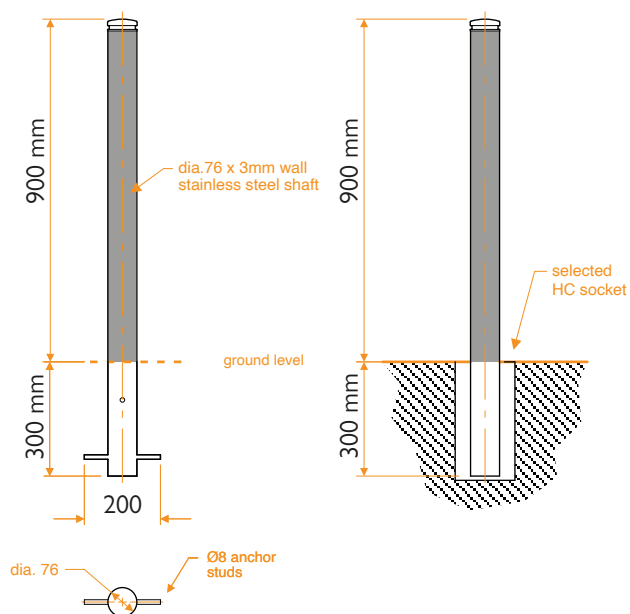

Fixed

Removable

### Specifications:

Pipe (Dia)	76 mm
Wall Thickness	4 mm
Overground	900 mm
Underground	300 mm



**HARTECAST**  
Street Furniture