

HC2076 BOLLARD



➤ **HC2076 Bollard** with Flat Top

Specifications:

- Stainless steel bollard with flat top.
- Pipe is 114 mm dia with a 4 mm thickness.
- 900 mm overground level and 300 mm underground level.
- Polyester powder coat finish, see our colour options. ➤

Fitting:

Fixed bollard is fixed underground level in concrete, removable bollard comes complete with retention socket.

Concrete Foundations:

Fixed bollard: 500 x 500 x 300 mm

Removable Bollard: 500 x 500 x 300 mm (*hardcore for drainage is recommended under the socket before the concrete*).

Options Available:

- Fixed and removable versions available.
- Range of retention sockets available.
- Ram Raid
- Other lengths available on request.
- Base plates available to surface fix.
- Colours.

Specifications:

Pipe (Dia)	114 mm
Wall Thickness	4 mm
Overground	900 mm
Underground	300 mm

BOLLARD RANGE




➤ Options **Reflective tape**



➤ **HC114F Ductile Iron Retention Socket**



➤ **HC114R Stainless Steel Retention Socket**

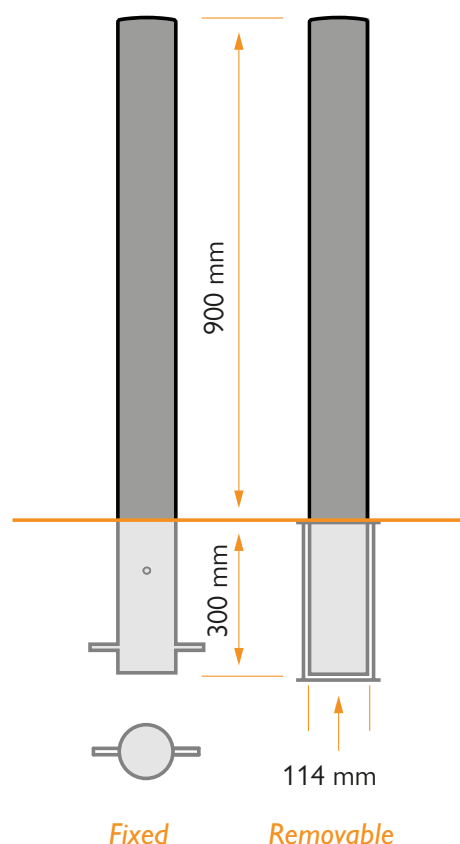

HARTECAST
Street Furniture