

HC2069 BOLLARD

BOLLARD RANGE



➤ **HC2069C** *Bollard with yellow collar*



➤ **HC2069**
With yellow ring



➤ **HC2069**



➤ **HC101F**
Retention Socket



➤ **HC101R**
Retention Socket

Specifications:

- Stainless steel bollard with cast stainless steel angled cap with ridge design.
- Brushed stainless steel finish
- The optional contrasting colour top section can be 50/100/150 – ref HC2069C
- DDA compliant for visually impaired
- 316 grade stainless steel.
- Pipe is 101mm x 3mm wall thickness.
- 900mm overground level and 300mm underground level.

Fitting:

Fixed bollard is fixed underground level in concrete, removable bollard comes complete with retention socket.


Concrete Foundations:

Fixed bollard: 500 x 500 x 300 mm

Removable bollard: 500 x 500 x 300 mm (*hardcore for drainage is recommended under the socket before the concrete.*)

Options Available:

- Fixed and removable versions available.
- Other lengths available on request.
- Range of retention sockets available.
- Base plates available.
- Colours.
- Also available with double collar HC2068DC. ➤

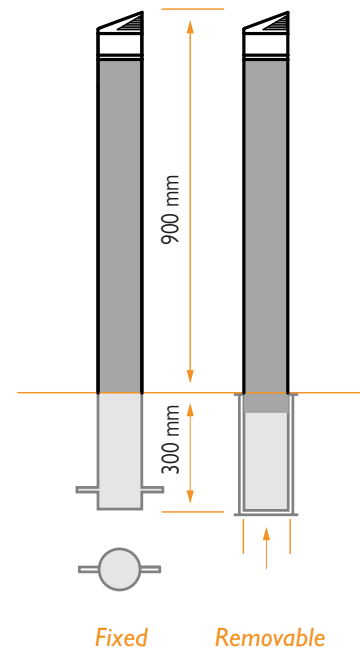

Specifications:

Pipe (Dia)	101 mm
Wall Thickness	3 mm
Overground	900 mm
Underground	300 mm



HARTECAST
Street Furniture